



London



BIKE COMPONENTS & ACCESSORIES 2022

T H I N K | D E S I G N | C R A F T | R I D E

"It's curious how the best performing designs are often the most beautiful of shapes"



SERIES

Krypton
Helium
Sulfur

DROPPER POST

Seatpost Pija
Seatpost Pija SL

COMPONENTS & ACCESORIES

Chainguides
Chainrings
Bosch kiox mount
Pedals
Grips
Rotors
Disc brake pads
Headsets
Bottlecages
Pumps
Multitools
Kit tubeless
Foam inserts
Lights
Bike protections
Frame straps

I N D E X



K R Y P T O N S E R I E S

Optimizes form and function to keep the rider connected to the bike on the world's roughest tracks.

DIRT JUMP



DOWNHILL



FREERIDE



ENDURO



ALL MTN



XC PRO





KRYPTON CARBON 0.5 800mm

- Unidirectional carbon fiber
- Optimized fiber orientation for greater stiffness and absorption

Bar bore: 31.8mm


Rise: 10mm

Upsweep: 5°

Backsweep: 9°

Length: 800mm

Weight: 200g



KRYPTON CARBON 1.0 800mm

- Unidirectional carbon fiber
- Optimized fiber orientation for greater stiffness and absorption

Bar bore: 31.8mm


Rise: 25mm

Upsweep: 5°

Backsweep: 9°

Length: 800mm

Weight: 200g





KRYPTON CARBON 0.5 800mm BB35

- Unidirectional carbon fiber
- Optimized fiber orientation for greater stiffness and absorption

Bar bore: 35mm



Rise: 12.5mm

Upsweep: 5°

Backsweep: 9°

Length: 800mm

Weight: 220g



KRYPTON CARBON 1.0 800mm BB35

- Unidirectional carbon fiber
- Optimized fiber orientation for greater stiffness and absorption

Bar bore: 35mm


Rise: 25mm

Upsweep: 5°

Backsweep: 9°

Length: 800mm

Weight: 230g






KRYPTON FG 30mm BB35

- High quality alloy 6061-T6
- Extensive and high precision CNC machining
- Optimized weight-to-strength ratio
- Zero gap

Bar bore: 35mm
Rise: 0mm

Length: 30mm
Weight: 131g



KRYPTON FG 30mm

- High quality alloy 6061-T6
- Extensive and high precision CNC machining
- Optimized weight-to-strength ratio
- Zero gap

Bar bore: 31.8mm
Rise: 0mm

Length: 30mm
Weight: 120g




KRYPTON HC 40mm

- High quality alloy 6061-T6,
made by extensive CNC machining process
- Optimized weight-to-strength ratio
- Prismatic design: flat faces and sharp edges

Bar bore: 31.8mm
Rise: 0mm

Length: 40mm
Weight: 137g






KRYPTON DH CNC INTEGRATED 10mm

- High quality alloy 6061-T6
- Extensive and high precision CNC machining
- Three bolts design
- Optimized weight-to-strength ratio
- 4 positions: Height (+0mm / +4mm / +6mm / +10mm)

Bar bore: 31.8mm **Length:** 10mm
Rise: 0 / 4 / 6 / 10mm **Weight:** 90g



KRYPTON DH CNC INTEGRATED 25/30mm

- High quality alloy 6061-T6
- Extensive and high precision CNC machining
- Optimized weight-to-strength ratio
- Zero gap
- 8 positions: Height (+0mm / +4mm / +6mm / +10mm / Length (25mm / 30mm))

Bar bore: 31.8mm **Length:** 25 / 30mm
Rise: 0 / 4 / 6 / 10mm **Weight:** 99g





* Available in BB35

KRYPTON DH CNC INTEGRATED 45/50mm

- High quality alloy 6061-T6
- Extensive and high precision CNC machining
- Three bolts design
- Optimized weight-to-strength ratio
- Zero gap
- 8 positions: Height (+0mm / +4mm / +6mm / +10mm) Length (45mm / 50mm)

Bar bore: 31.8mm **Length:** 45 / 50mm
Rise: 0 / 4 / 6 / 10mm **Weight:** 105g





H E L I U M S E R I E S

Balances the cleanest lines and the lightest weights to achieve world class performance in component design, where strength and comfort equal speed and control.

DIRT JUMP



DOWNHILL



FREERIDE



ENDURO



ALL MTN



XC PRO



 No weight limit



HELIUM CARBON 0.0 750mm

- Exceptional vibration damping performance and steering precision
- Unidirectional carbon fiber
- Optimal fiber orientation for good lateral stiffness

Bar bore: 31.8mm


Rise: 0mm

Upsweep: 0°

Backsweep: 6.5°

Length: 750mm

Weight: 172g



 No weight limit



HELIUM CARBON 0.2 760mm

- Exceptional vibration damping performance and steering precision
- Unidirectional carbon fiber
- Optimal fiber orientation for good lateral stiffness

Bar bore: 31.8mm


Rise: +/- 4.8mm

Upsweep: 0°

Backsweep: 9°

Length: 760mm

Weight: 175g



 No weight limit



HELIUM CARBON 0.5 760mm

- Exceptional vibration damping performance and steering precision
- Unidirectional carbon fiber
- Optimal fiber orientation for good lateral stiffness

Bar bore: 31.8mm


Rise: 12.5mm

Upsweep: 3°

Backsweep: 5°

Length: 760mm

Weight: 180g



 No weight limit



HELIUM CARBON 1.0 760mm

- Exceptional vibration damping performance and steering precision
- Unidirectional carbon fiber
- Optimal fiber orientation for good lateral stiffness

Bar bore: 31.8mm


Rise: 20mm

Upsweep: 4°

Backsweep: 9°

Length: 760mm

Weight: 183g



 No weight limit



HELIUM CARBON ACL 0.0 750mm

- ACL (advanced carbon layup) technology
- Exceptional vibration damping performance and steering precision
- Unidirectional carbon fiber
- Optimal fiber orientation for a good lateral stiffness
- Lightest handlebar on market

Bar bore: 31.8mm


Rise: 0mm

Upsweep: 0°

Backsweep: 6.5°

Length: 750mm

Weight: 115g



 No weight limit



HELIUM CARBON ACL 0.2 760mm

- ACL (advanced carbon layup) technology
- Exceptional vibration damping performance and steering precision
- Unidirectional carbon fiber
- Optimal fiber orientation for a good lateral stiffness
- Reversible: +/- 4.8mm

Bar bore: 31.8mm


Rise: +/- 4.8mm

Upsweep: 0°

Backsweep: 9°

Length: 760mm

Weight: 133g




HELIUM CNC -8°

- Optimized design for CNC milling and super low weight/strength ratio
- 6 bolts hardware
- Wide bar clamp for a super stiff cockpit
- Low profile design

Bar bore: 31.8mm

Rise: -8°

Length: 50 / 60 / 70 / 80 / 90mm

Height: 32mm

Bar clamp width: 55mm

Weight: 91g (50mm)



ALLOY



LENGTH


HELIUM CNC -17°

- Optimized design for CNC milling and super low weight/strength ratio
- 6 bolts hardware
- Wide bar clamp for a super stiff cockpit
- Low profile design

Bar bore: 31.8mm

Rise: -17°

Length: 50 / 60 / 70 / 80 / 90mm

Height: 32mm

Bar clamp width: 55mm

Weight: 92g (50mm)



ALLOY



LENGTH

HELIUM CARBON VFLEX


- Monocoque UD carbon fiber
- Design allows more flexion for improved comfort
- 0° offset head with millimetric saddle adjustment

Offset: 0mm

Diameter: 27.2 / 31.6mm

Length: 400mm

Weight: 164g (27.2)



HELIUM CARBON OR


- Monocoque UD carbon
- 0° offset head with millimetric saddle adjustment
- Carbon fiber bottom clamp

Offset: 0mm

Diameter: 27.2 / 30.9 / 31.6mm

Length: 400mm

Weight: 220g (27.2mm)



HELIUM CARBON 1R


- Monocoque UD carbon fiber
- Millimetric saddle adjustment

Offset: 20mm

Diameter: 27.2 / 31.6mm

Length: 420mm

Weight: 202g (27.2)





S U L F U R S E R I E S

Brings progressive component design to the trail with value and style.

DIRT JUMP



DOWNHILL



FREERIDE



ENDURO



ALL MTN



XC PRO






SULFUR 0.0 760mm

- Alloy 6061 T6
- Double-buttet

Bar bore: 31.8mm
Rise: 0mm
Upsweep: 0°

Backsweep: 5°
Length: 760mm
Weight: 335g




SULFUR 0.2 760mm

- Alloy 6061 T6
- Double-buttet

Bar bore: 31.8mm
Rise: 4,8mm
Upsweep: 0°

Backsweep: 9°
Length: 760mm
Weight: 340g





SULFUR 0.5 780mm

- Alloy 6061 T6
- Double-buttet

Bar bore: 31.8mm


Rise: 10mm

Upsweep: 5°

Backsweep: 9°

Length: 780mm

Weight: 360g



ALLOY

780mm

LENGTH



SULFUR 1.0 780mm

- Alloy 6061 T6
- Double-buttet

Bar bore: 31.8mm


Rise: 20mm

Upsweep: 5°

Backsweep: 9°

Length: 780mm

Weight: 365g



ALLOY

780mm

LENGTH




SULFUR 1.5 780mm

- Alloy 6061 T6
- Double-buttet

Bar bore: 31.8mm
Rise: 38mm
Upsweep: 5°

Backsweep: 9°
Length: 780mm
Weight: 375g




SULFUR 0.5 800mm BB35

- Alloy 6061 T6
- Double-buttet

Bar bore: 35mm
Rise: 12,5mm
Upsweep: 5°

Backsweep: 9°
Length: 800mm
Weight: 380g






SULFUR 1.0 800mm BB35

- Alloy 6061 T6
- Double-buttet

Bar bore: 35mm
Rise: 25,4mm
Upsweep: 5°

Backsweep: 9°
Length: 800mm
Weight: 385g



ALLOY

800mm
 LENGTH



SULFUR 1.5 800mm BB35

- Alloy 6061 T6
- Double-buttet

Bar bore: 35mm
Rise: 38mm
Upsweep: 5°

Backsweep: 9°
Length: 800mm
Weight: 395g



ALLOY

800mm
 LENGTH



SULFUR 0° 30mm

- High quality alloy 6061 T6, made by 3D forging process
- CNC finishes to optimize the weight

Bar bore: 31.8mm / 35mm

Rise: 0°

Length: 30mm

Weight: 115g

* Available in BB35




ALLOY



30mm

LENGTH

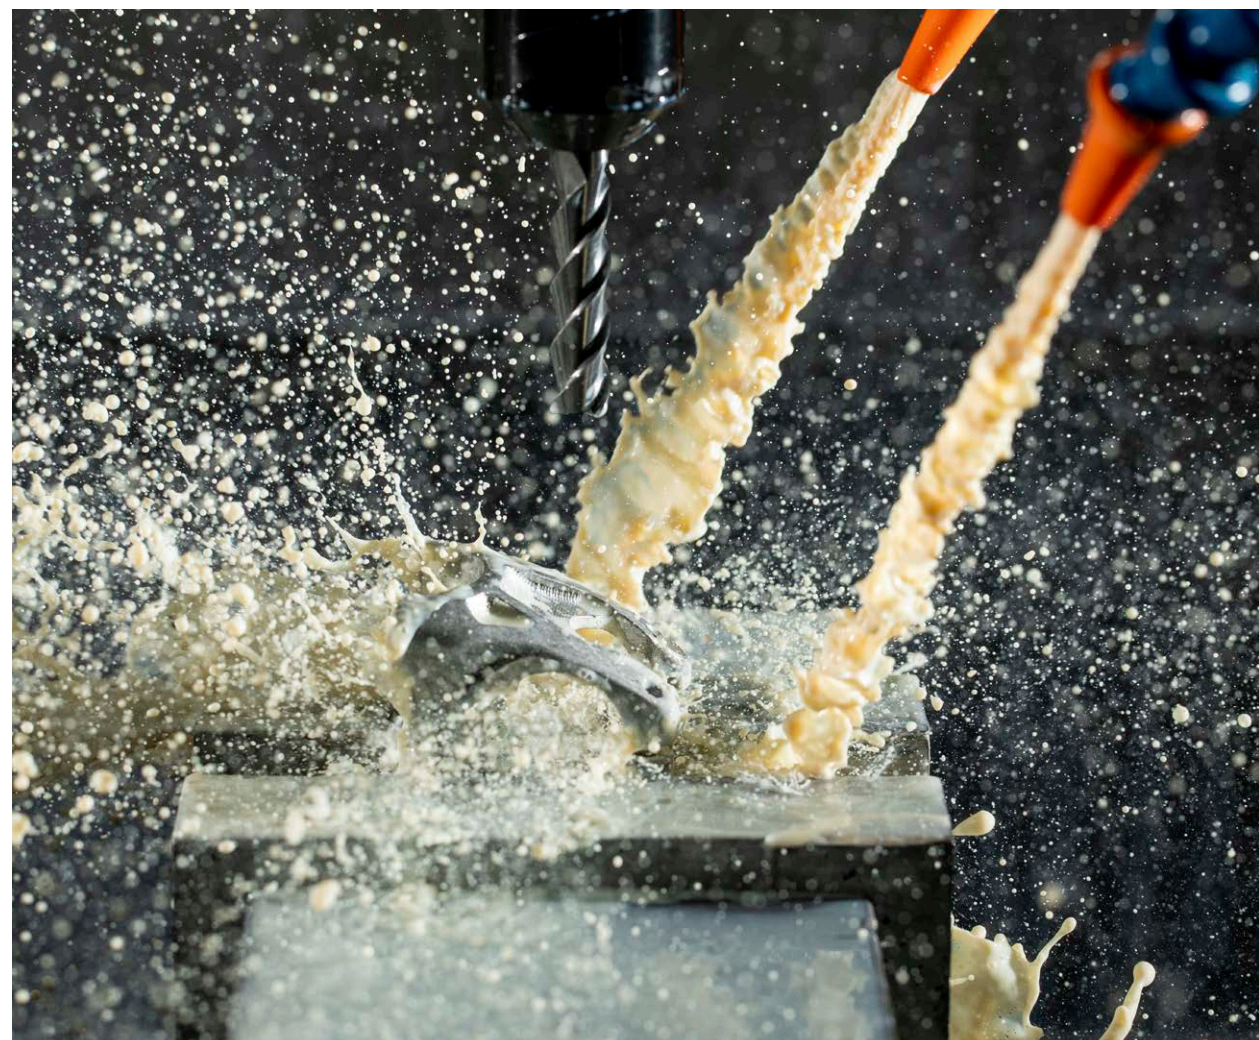



SULFUR V2 $\pm 7^\circ$

- High quality alloy 6061 T6, made by 3D forging process
- Clean looking and smooth sandblasting finish

Bar bore: 31.8mm

Rise: $\pm 7^\circ$

Length: 50 / 60 / 70 / 80 / 90mm

Weight: 112g (70mm)



ALLOY



LENGTH



SULFUR V2 $\pm 17^\circ$

- High quality alloy 6061 T6, made by 3D forging process
- Clean looking and smooth sandblasting finish

Bar bore: 31.8mm

Rise: $\pm 17^\circ$

Length: 60 / 70 / 80 / 90 / 100mm

Weight: 117g (70mm)



ALLOY



LENGTH



SULFUR V2 $\pm 35^\circ$

- High quality alloy 6061 T6, made by 3D forging process
- Clean looking and smooth sandblasting finish

Bar bore: 31.8mm


Rise: $\pm 35^\circ$

Length: 70 / 90 / 110mm

Weight: 142g (70mm)



ALLOY



LENGTH

SULFUR 0R


- Alloy 6061 T6 3D forged head
- Oval inside wall to increase stiffness
- 0° offset head with two asymmetrical bolts adjustment

Offset: 0mm

Diameter: 27.2 / 30.9 / 31.6mm

Length: 400mm

Weight: 318g (27.2mm)

**SULFUR 15R**


- Alloy 6061 T6 3D forged head
- Oval inside wall to increase stiffness
- 15mm offset head with two asymmetrical bolts adjustment

Offset: 15mm

Diameter: 27.2 / 30.9 / 31.6mm

Length: 400mm

Weight: 323g (27.2mm)





pija | S E A T P O S T



* 27.2mm / 110mm



PIJA DROPPER SEAPOST

- Internal routing (ICR)
- Infinitely adjustable height
- Replaceable cartridge, very low maintenance. Adjustable air pressure (only in 31.6mm models)
- Replaceable sealed cartridge. Adjustable extension speed through air load (only in 31.6mm models)
- New DU bushings
- Oversized stanchion
- Remote lever with bearing
- Available in 31.6mm and 27.2mm
- Adjustable max extension in 30mm, by 5mm steps


Diameter: 27.2mm / 31.6mm

Travel: 110mm / 125mm / 150mm / 170 mm / 200mm

Weight: 548g (110mm) / 515g (125mm) / 559g (150mm) / 589g (170mm) / 635g (200mm)



ALLOY



LENGTH



* 31.6mm / 125mm



* 31.6mm / 150mm



* 31.6mm / 170mm



* 31.6mm / 200mm



27.2mm / 70mm

PIJA DROPPER SEATPOST SL EDITION Ø27.2

- Internal routing (ICR)
- Infinitely adjustable height
- Full alloy replaceable cartridge, very low maintenance.
- Remote lever with bearing
- Super low stack design
- Optimized design for an optimal weight/strength ratio
- Silver anodized surface; brushed by hand

Diameter: 27.2mm

Travel: 70mm

Length: 350mm

Weight: 365g



ALLOY



LENGTH



31.6mm / 125mm

PIJA DROPPER SEATPOST SL EDITION Ø31.6

- Internal routing (ICR)
- Infinitely adjustable height
- Full alloy replaceable cartridge, very low maintenance
- Adjustable max. extension in 30mm, by 5mm steps
- Adjustable extension speed through air load
- Remote lever with bearing
- Super low stack design
- Optimized design for an optimal weight/strength ratio
- Silver anodized surface; brushed by hand

Diameter: 31.6mm

Travel: 125mm

Length: 385mm

Weight: 468g




ALLOY



LENGTH

COMPONENTS & ACCESORIES

Chainguides
Chainrings
Bosch kiox mount
Pedals
Grips
Rotors
Disc brake pads
Headsets
Bottlecages
Pumps
Multitools
Kit tubeless
Foam inserts
Lights
Bike protections
Frame straps

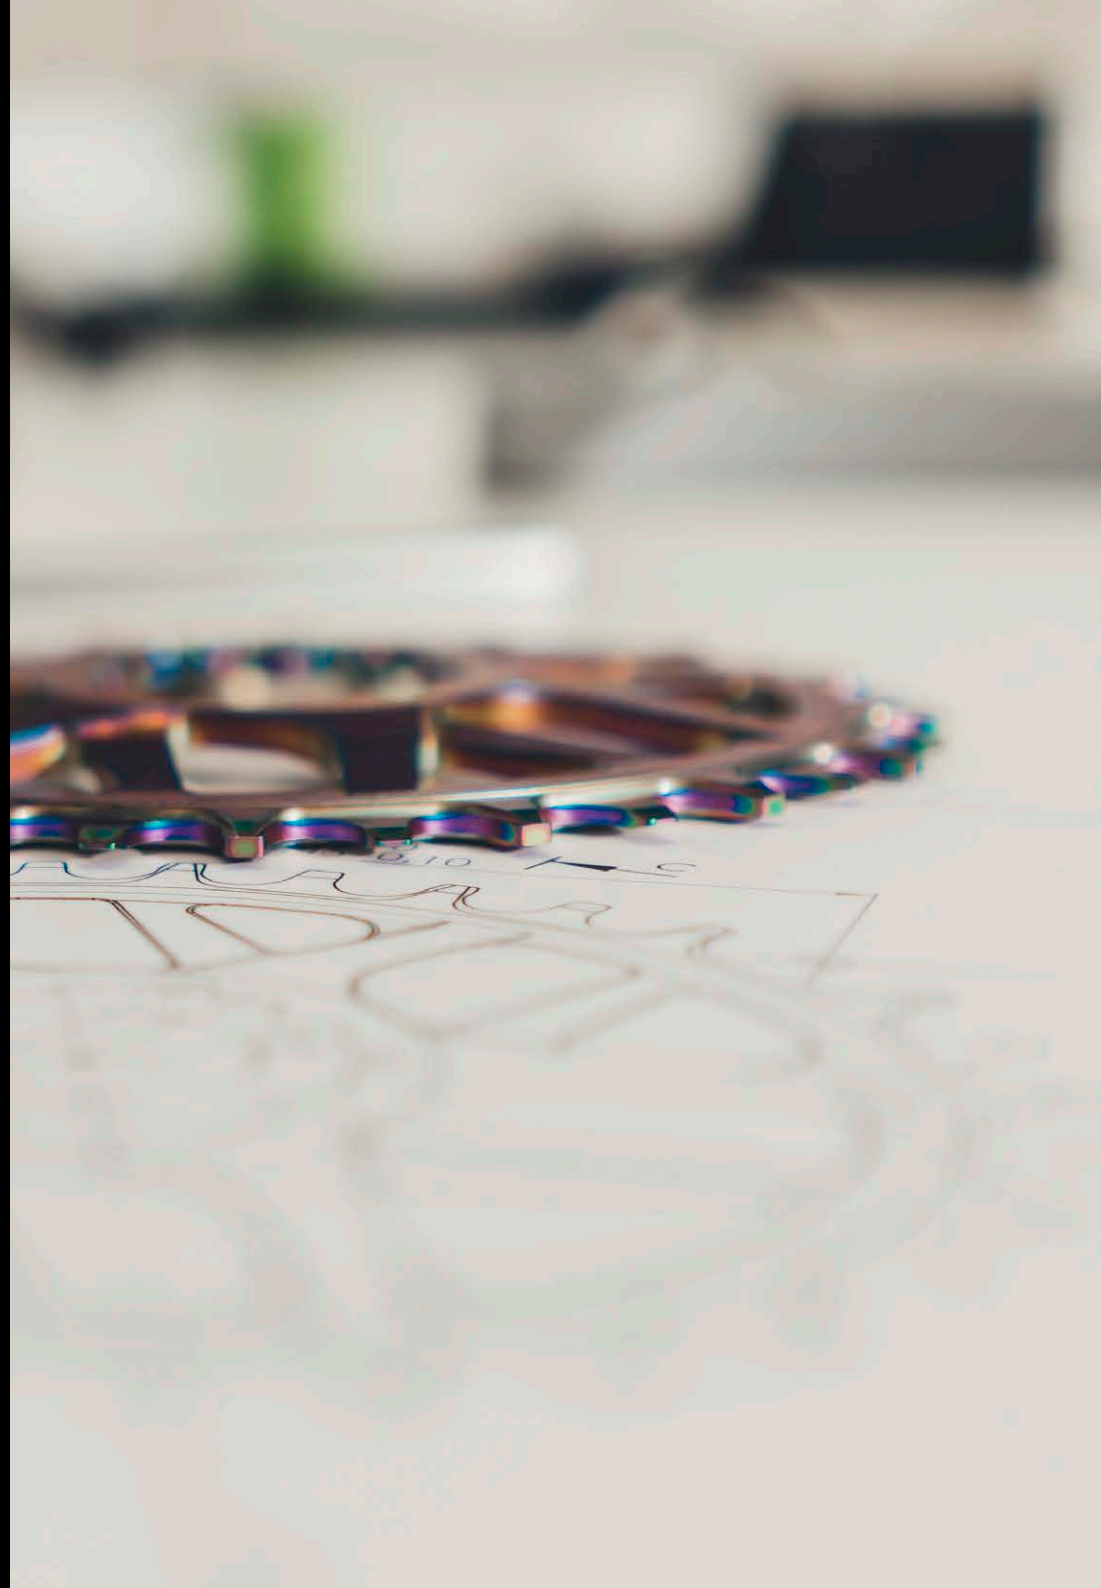


CHAINGUIDE ENDURO CARBON

- Carbon fiber with nylon
- Designed for MTB 1x drive train system
- Body made with carbon long fibers and nylon
- Extremely durable and light
- Easy to set up the top guide position

Speeds: 1X - 9/10/11/12sp

Range: 30T - 38T

Attachment: ISCG05

Weight: 28g



CARBON


CHAINGUIDE CG-01

- Plastic upper guard
- Adjustable chainline
- Alloy 6061-T6

Speeds: 1X - 9/10/11/12sp

Range: 30T - 38T

Attachment: clamped to seat tube

31.8mm / 34.9mm

Weight: 57g



ALLOY


CHAINGUIDE CG-02

- Direct mount type
- Full CNC body
- Alloy 6061-T6

Speeds: 1X - 9/10/11/12sp

Range: 30T - 38T

Attachment: direct mount

Weight: 47g



ALLOY


CHAINGUIDE CG-03

- Designed for MTB 1x drive train system
- Special design for 28T - 32T chainrings for enduro use
- Full CNC body
- Alloy 6061-T6

Speeds: 1X - 9/10/11/12sp

Range: 28T - 32T

Attachment: ISCG/ISCG05

Weight: 52g



ALLOY



CHAINGUIDE CG-04

- Designed for Downhill 1x drive train system
- Bash guard made with ultra durable swiss quality pastic
- Alloy 6061-T6

Speeds: 1X - 9/10/11/12sp

Range: 32T - 38T

Attachment: ISCG/ISCG05

Weight: 169g



ALLOY



BOTTOM GUARD SPARE

- Spare part for the CG-04 and CG-04NR chainguide
- Two red anodized bolts
- Ultra durable swiss quality pastic

Weight: 33g



ROLLER SPARE CG-04

- Spare part for the CG-04 chainguide
- Red anodized bolt
- Plastic

Speeds: 1X - 9/10/11/12sp

Weight: 28g



CHAINGUIDE CG-04 NR

- Designed for Downhill 1x drive train system
- Bash guard made with ultra durable swiss quality pastic
- Alloy 6061-T6

Speeds: 1X - 9/10/11/12sp

Range: 32T - 38T

Attachment: ISCG/ISCG05

Weight: 116g



ALLOY



DIRECT MOUNT GPX CHAINRING

- Full CNC alloy 7075-T6
- Narrow wide design
- Mud optimized
- Alloy 7075 - T6

Speeds: 1X - 9/10/11/12sp

Range: 28T/30T/32T/34T/36T

Attachment: Sram GXP

Offset: 6mm / 3mm (Boost)

Colour: Black / Red

Weight: 56g (28T), 61g (30T), 66g (32T), 71g (34T), 79g (36T)



ALLOY



104BCD CHAINRING

- Full CNC alloy 7075-T6
- Narrow wide design
- Mud optimized
- Alloy 7075 - T6

Speeds: 1X - 9/10/11/12sp

Range: 30T/32T/34T/36T

Attachment: 104mm - 4 bolts

Offset: 2mm

Colour: Black / Red

Weight: 38g (30T), 42.25g (32T), 46.5g (34T), 56g (36T)



ALLOY



104BCD OVAL CHAINRING

- Made of full CNC alloy 7075-T6
- Narrow wide design
- 12,5% ovality

Speeds: 1X - 9/10/11/12sp

Range: 30T/32T/34T

Attachment: 104mm - 4 bolts

Offset: 6mm


Colour: Black

Weight: 38g (30T), 42.25g (32T), 46.5g (34T)

Ovality: 12,5%



ALLOY

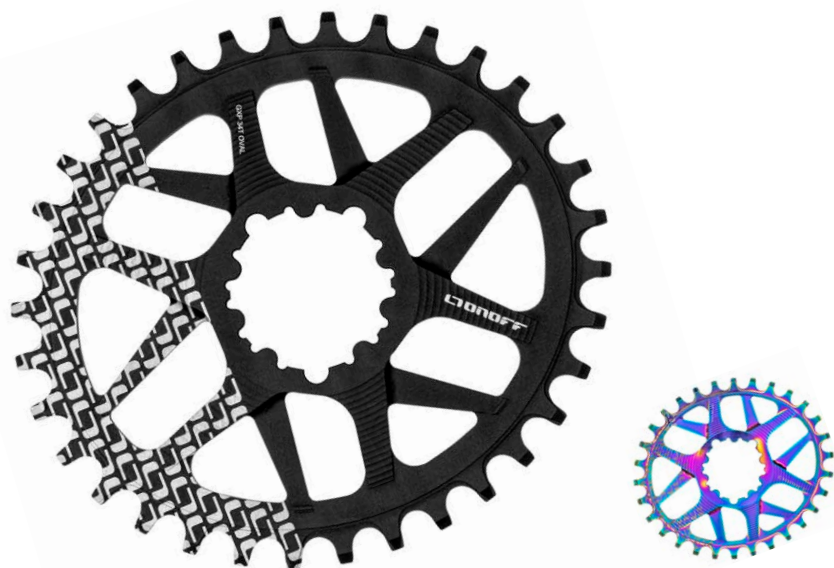

DIRECT MOUNT OVAL GXP CHAINRING

- Full CNC alloy 7075-T6
- Narrow wide design
- 12,5% ovality

Speeds: 1X - 9/10/11/12sp

Range: 30T/32T/34T

Attachment: Sram GXP

Offset: 6mm / 3mm (boost)

Colour: Black / Oil Slick

Weight: 38g (30T), 42.25g (32T), 46.5g (34T)

Ovality: 12,5%





BOSCH CRANK SPIDER

- Designed for BOSCH performance CX gen4
- 104 BCD chainring attachment
- Made of ALLOY 6061 T6

Attachment: bosch performance cx g4

Chainring Attachment: 104 bcd

Weight: 44g



e-BIKE CHAINRING BOSCH

- Bosch compatible
- Durable cromoly construction

Speeds: 11/12sp

Range: 14T/16T

Attachment: BOSCH performance

Offset: 6mm

Weight: 29g (14T), 46g (16T)



e-BIKE LOCKRING BOSCH

- Made with strong and light Alloy 6061-T6

Speeds: 11/12sp

Range: 28T - 32T

Attachment: BOSCH performance

Weight: 23g



**BOSCH KIOX MOUNT**

- High quality resin injection
- Optimized design for wide enduro stems, allowing to place the display on the center of the cockpit

Bar Bore: 31.8mm

Weight: 26g





RESIN PEDAL

- Cromoly axel supported by 3 bearings; two sealed cartridge bearings and one needle roller bearing
- Ultra-strong nylon plataform (105x105mm), created following a complete ergonomic study
- 12 pins by side strategically placed
- 2mm convex profile

Size: 105x105mm

Colour: Gray / Black / Red / Green

Weight: 360g/pair

■ Gray ■ Black ■ Green ■ Red



CLAW V2

- One piece alloy body
- CNC finishes
- Removable pins
- 12mm chromoly axle

Size: 24x95x110mm

Colour: Black

Weight: 385g/pair

■ Black





DESERT

- Contra-rotating saw-tooth profile
- Orientated sand-wave pattern
- Single CNC locking
- Inner tapered construction
- 2mm tapered rubber surface

Size: S/M or L/XL

Length: 135mm

Weight: S/M: 88g/pair / L/XL: 101g/pair

- Black/Red
- Black/Black
- Black/Blue
- Red/Black
- Orange/Black



CONTRA-ROTATING SAW-TOOTH PROFILE

Provides a huge amount of grip




ORIENTATED SAND-WAVE PATTERN

Designed for a fast mud and sweat evacuation



SINGLE CNC LOCKRING

Very light weight



INNER TAPERED CONSTRUCTION

To avoid the grip rotation



2MM TAPERED SURFACE

For an improved ergonomoy











TWIN

- Made from a single piece
- External tapered surface
- Diamond texture for an improved grip

Length: 135mm

Weight: 90g/pair

- | | |
|--|--|
|  Black |  Yellow |
|  Red |  Blue |
|  Orange |  Green |




WAVE

- Double compound Kraton/Gel
- Slim fit

Length: 130mm

Weight: 95g/pair

- | |
|---|
|  Black / White |
|  Red / Orange |
|  Lime / Green |




FOAM

- Double lock-on handlebar adjustment system
- Confort foam

Length: 130mm

Weight: 90g/pair

- | |
|---|
|  Black / Black |
|  Black / Red |
|  Red / Black |








SHAPER

- Made from a single piece
- External tapered surface
- 4 different textures for an expecional comfort

Length: 130mm

Weight: 132g/pair

- | | |
|--|--|
|  Black |  Blue |
|  Red |  Grey |
|  Orange | |




SILICONE

- Asymmetrical design
- Maximum grip and shock absorption

Length: 130mm

Weight: 60g/pair

- | |
|---|
|  Black |
|  White |
|  Red |

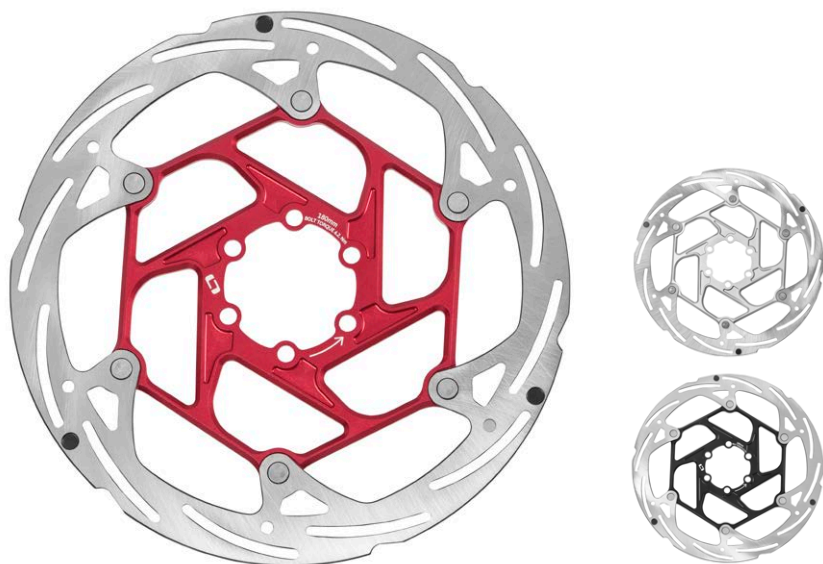
**2 PIECES CNC**


- Safety chamfered edge to avoid injuries
- Stainless steel braking band + 7075 alloy carrier
- Wear indicators
- Excellent braking stability at high speed
- Smooth braking and reduced noise braking band design

Diameter: 140 / 160 / 180 / 203mm

Colour: Black / Silver / Red

Weight: 113g (140mm) / 136g (160mm) / 156g (180mm) / 195g (203mm)

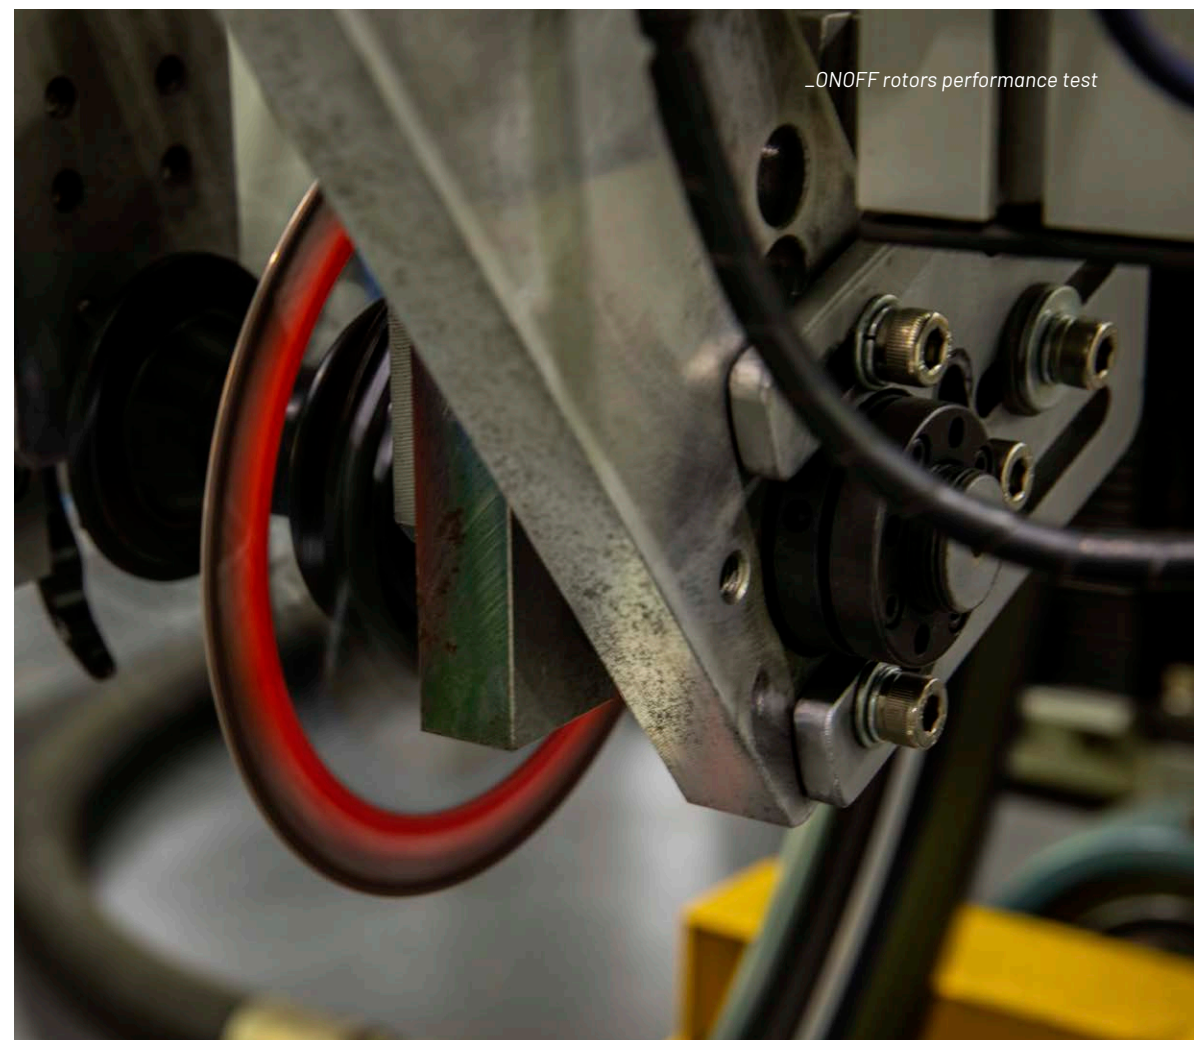

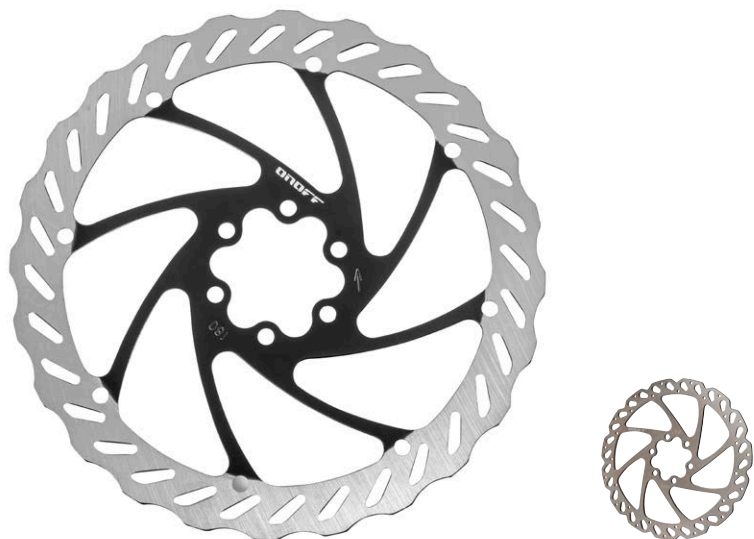

STANDARD


- High strength
- Superior heat dissipation
- Excellent disc wear
- Stainless steel

Diameter: 160 / 180 / 203mm

Colour: Steel / Black

Weight: 115g (160mm) / 150g (180mm) / 195g (203mm)

* Available in 220mm

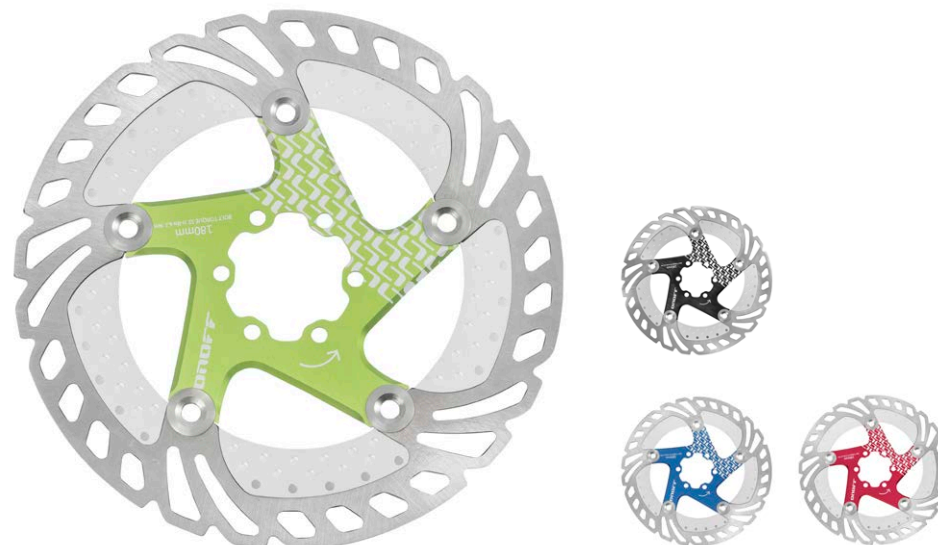

FLOATING COOLER

- 3 piece cooling rotor
- Efficient heat-dissipation alloy fins
- Thermal tested (Up to 20 seconds faster cooling recovery)
- 7075 alloy carrier + 1050 alloy fins + stainless braking band

Diameter: 160 / 180 / 203mm

Colour: Black / Blue / Red / Green

Weight: 126g (160mm) / 150g (180mm) / 215g (203mm)



* Available in 25prs BOX

ORGANIC WITH COOLING FINS

- The pad offers a perfect blend of feel and power and gives an excellent heat dissipation
- Cooling fins reduce temperature by 50°C
- Replaceable pads
- Very low disc wear
- Compound: Kevlar, ceramic, copper, resin
- Replacement specific pads available

SINTERED

- Recommended use: High performance pad for competitive XC, Freeride and Downhill
- Exceptional high temperature performance
- Exceptional wet performance
- Exceptional pad wear
- Advanced high strength steel back plate
- Compound: copper, alloy, ceramic

ORGANIC

- Recommended use: The pad offers a perfect blend of feel and power and gives an excellent bite from cold. Suitable for daily use
- Very good noise characteristics
- Very low disc wear
- Advanced high strength steel back plate
- Compound: Kevlar, ceramic, copper, resin

e-BIKE ORGANIC

- These pads has been developed for a high performance braking systems to stand the most demanding conditions
- Specially designed for Ebike and Gravity use
- High Kevlar content for a great estabily under high temperatures
- Same advantages as organic compounds; perfect blend of feel and power and gives an excellent bite from cold. Suitable for daily use
- Very good noise characteristics
- Very low disc wear
- Advanced high strength steel back plate




TECKTRO MECÁNICO

Organic




HAYES EL CAMINO

Organic




HAYES STROKER RYDE

Organic




HAYES SOLE

Organic




AVID ELIXIR / SRAM LEVEL T

Organic / Sintered / Cooler / e-Bike Organic



AVID XO TRAIL / GUIDE / G2

Organic / Sintered / Cooler / e-Bike Organic




AVID JUICY

Organic




FORMULA ORO

Organic




FORMULA ONE, R1, RX

Organic / Sintered / Cooler




TECKTRO HIDRA / SHIMANO M475, M515, M525, M465, M495*

Organic / e-Bike Organic



SHIMANO DEORE M555

Organic




SHIMANO XT M755

Organic




SHIMANO XTR M965 / SAINT M800 / XT M765 / SLX M665 HONE M601 / LX M585

Organic / Cooler




SHIMANO XTR M985-M988, XT M785, SLX M666-675*

Organic / Sintered / Cooler / e-Bike Organic



SHIMANO SAINT M810, ZEE

Cooler / e-Bike Organic



SRAM LEVEL ULT. / SRAM RED

MAIN SPECS

- Aluminum CNC cups with precision bearing race
- Full cartridge sealed bearing
- Aluminum compression ring
- Black anodize with lazer etch finish



HEADSET SATURN TAPERED

Zero Stack (or semi-integrated)
Tapered

Top cup: 1 1/8"
Bottom cup: 1 1/2"
Weight: 87g



HEADSET SATURN REGULAR 1-1/8"

Zero Stack (or semi-integrated)

Top cup: 1 1/8"
Bottom cup: 1 1/8"
Weight: 88g



HEADSET MERCURIUM TAPERED REDUCED

Zero Stack (or semi-integrated)
Tapered

Top cup: 1 1/8"
Bottom cup: 1 1/8" for 1 1/2" steerer tube
Weight: 110g



HEADSET MERCURIUM FIT 1-1/2" REDUCED

Zero Stack (or semi-integrated)
Tapered

Top cup: 1 1/8" for 1 1/2" frame
Bottom cup: 1 1/8" for 1 1/2" frame
Weight: 160g



HEADSET T-GLOBE 44

Top cup: 1 1/8" Zero Stack (or semi-integrated)
Bottom cup: 1 1/2" External
Weight: 116g



HEADSET TERRA EXTERNAL

External Headset

Top cup: 1 1/8"
Bottom cup: 1 1/8"
Weight: 120g



CARBON PRO II

- 100% Carbon body
- Great flexibility and lightness
- Anti-movement rubber clamp

Weight: 18g



CARBON SIDE

- 100% Carbon body
- Great flexibility and lightness

Weight: 18g



WING

- Polycarbonate body
- Flexible design

Weight: 35g

Black / Red

Black / White



SIDE

- Forged alloy
- Lateral aperture to easy bottle use

Weight: 32g

Black / White




White / Red



FIBER

- Polycarbonate body
- Flexible design

Weight: 28g

-  Black / Red
-  Black / White
-  White / Red



BLADE

- Alloy 5052
- Anti-movement rubber clam

Weight: 26g

-  Black / Red
-  Black / White



PIPE

- Forged alloy
- Big aperture to easy bottle use

Weight: 59g

-  Black
-  White



JET B01

- CNC Alloy body
- Capacity: 115PSI / 8Bar

Size: 99x21x36mm

Head: Presta (Schrader adaptor)

Weight: 59g

Black Red



JET B02

- CNC Alloy body
- Capacity: 160PSI / 11Bar

Size: 150x21x36mm

Head: Presta (Schrader adaptor)

Weight: 77g

Black Red



JET B03

- CNC Alloy body
- Capacity: 115PSI / 8Bar

Size: 210x27x27mm

Head: Presta (Schrader adaptor)

Weight: 128g

Black Red



JET B04

- CNC Alloy body
- Capacity: 160PSI / 11Bar

Size: 245x25x38mm

Head: Presta (Schrader adaptor)

Weight: 135g

Black Red



CHARGER 01 CO2

- CNC Alloy body
- CO₂ Cartridge compatible
- Capacity: 130psi / 9bar

Size: 124x28x48

Head: Presta (Schrader adaptor)

Weight: 68g

Black Red



CHARGER 02 CO2

- CNC Alloy body
- CO₂ Cartridge compatible
- Capacity: 130psi / 9bar

Size: 175x28x48

Head: Presta (Schrader adaptor)

Weight: 84g

Black Red



TRICK 8

Size: 32x72x12mm

Tool bits: Hex 2, 2.5, 3, 4, 5, 6mm / Phillips-Head / Star Shaped T25

Weight: 75g



TRICK 11

Size: 46x72x12mm

Tool bits: Hex 2, 2.5, 3, 4, 5, 6, 8mm / Flat Head / Phillips-Head / Star Shaped T25 / Chain Breaker: (9 / 10 / 11 speed)

Weight: 125g



TRICK 20

Size: 49x72x15mm

Tool bits: Hex 2, 2.5, 3, 4, 5, 6, 8mm / Flat Head / Phillips-Head / Star Shaped T25 / Chain Breaker: (9 / 10 / 11 speed) Spoke Wrenches: #1/#4, MAVIC M7 / SHIMANO Hex 4.6 / Tire Lever / Disc Brake Wedge

Weight: 145g

**HEX 10**

- Micro ratchet mechanism
- Neodymium magnet (N35/Ni)
- 10 functions

Size: 105x21mm

Tool bits: Hex 2, 2.5, 3, 4, 5, 6mm / Flat Head 5 / Phillips-Head 1 / Phillips-Head 2 / Star Shaped T25

Colour: Black / Silver

Max torque: 20 N.m

Weight: 110g



KIT TUBELESS

Complete kit for 4 wheels: 1x 10m rim tape / 2x 125ml tire sealant / 2x alloy presta valves / 1x service syringe

Tyre sealant*:

- Professional quality tyre sealant
- Professional quality
- Racing formula, latex based sealant
- Non-toxic / ammonia free / non-hazardous / non-corrosive

***Also available separately**

Rim tape:

- CO2 cartridges compatible
- 4 widths available: 23/26/29/32mm
- Provides a perfect seal and long lasting leak proof performance
- Do not leaves adhesive residues on the rim
- High pinch resistance

Tubeless alloy presta valve:

- Made of CNC alloy
- 44mm length

Service syringe:

- 60ml service syringe with presta valve adaptor



FOAM INSERT

- Low density compound; only 0,08g/cm³
- Dual tuned dumping for front and rear wheel. Soft and comfortable for front wheel and stiff and very protective for rear wheel
- Controlled rebound
- Very easy to install without deforming the tire
- Dual air chamber above and below the insert for an optimal air pressure control
- Transfer channels for a homogeneous distribution of tyre sealant
- Caulerized skin to avoid tyre sealant being absorbed

Diameter: 27.5 / 29mm

Section: Gravel / XC-Trail / Enduro-Gravity

Weight: 110g (XC-Trail)



OWL 01 F/R

- Alloy body

Super bright LED: Front 17Lm / Rear 7Lm

Power source: 2xCR2032

Function mode: Steady / Flash / Off

Run time: 50h Steady / 150h Flash

Size: D28x30mm

Weight: 23g

Black
 Red



OWL 02 F/R

- Alloy body

Super bright LED: Front 40Lm / Rear 15Lm

Power source: 220mAh Li-Polymer battery

Charge time: 2h USB

Function mode: High / Low / Flash / Off

Run time: 3h High / 6h Low / 25h Flash

Size: D29x35mm

Weight: 29g


Black
 Red

**MUDBEATER FRONT MUDGUARD**

- Durable, all-condition polypropylene
- Easy to install and remove
- Fork seals added protection

Size: 300x256mm

Weight: 27g

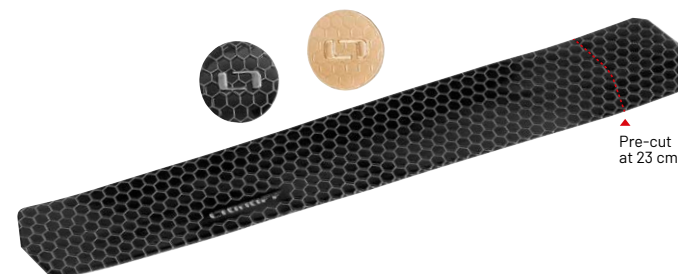**CHAINSTAY PROTECTOR + PATCHES**

- 3M® Self-adhesive
- Impact resistant, honeycomb design TPU
- All-condition and durable
- Ideal for carbon and alloy frames

Size: Chainstay Protector: 260/230x40mm


Patches: Ø 30mm

**FRAME STRAP**

- Compatible with frame tubes from 100mm to 200mm diameter
- Can fit one tube from 26" to 29", two 25gr CO2 cartridges or minipump, and tire levers



UDNORFF | WORKSHOP 2022

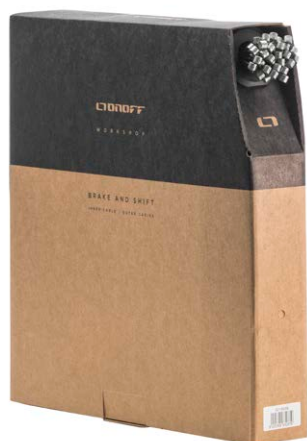

BRAKE CABLE

- Galvanized steel high tech sleek treatment

Length: 2000mm
Diameter: 1,5mm
Quantity per box: 50pcs



GEAR CABLE

- Galvanized steel high tech sleek treatment

Length: 2000mm
Diameter: 1,1mm
Quantity per box: 50pcs



TEFLON COATED GEAR CABLE

- Braided stainless steel
- Teflon coated
- Super low friction and smooth functioning


Length: 2000mm
Diameter: 1,1mm
Quantity per box: 50pcs



TEFLON COATED ROAD BRAKE CABLE

- Braided stainless steel
- Teflon coated
- Super low friction and smooth functioning"

Length: 2000mm
Diameter: 1,5mm
Quantity per box: 50pcs

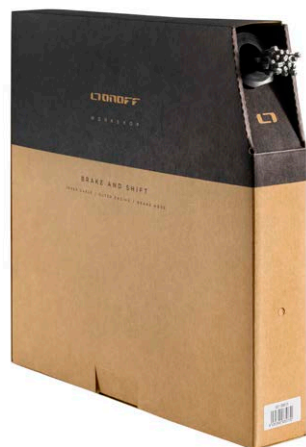

STAINLESS STEEL GEAR CABLE

- Braided stainless steel
- Length:** 2000mm
Diameter: 1,1mm
Quantity per box: 50pcs



STAINLESS STEEL ROAD BRAKE CABLE

- Braided stainless steel
- Length:** 2000mm
Diameter: 1,5mm
Quantity per box: 50pcs



GEAR HOUSING

- Standard SP linear shift housing
- Length:** 30m
Diameter: 4mm
Quantity per box: 1 x 30m



BRAKE HOUSING

- Standard 2P linear shift housing
- Length:** 30m
Diameter: 5mm
Quantity per box: 1 x 30m



SHIMANO HYDRAULIC HOSE

- Made of high quality Nylon

Length: 30m
Inner diameter: 2,3mm
Quantity per box: 1 x 30m



AVID/SRAM HYDRAULIC HOSE

- Made of high quality Nylon

Length: 30m
Inner diameter: 2,1mm
Quantity per box: 1 x 30m



BRAKE HOUSE FOR SRAM 2000MM

- Made of high quality Nylon
- Includes all needed installation hardware

Length: 2000mm
Inner diameter: 2,1mm




BRAKE HOUSE FOR SHIMANO 2000MM

- Made of high quality Nylon
- Includes all needed installation hardware

Length: 2000mm
Inner diameter: 2,3mm



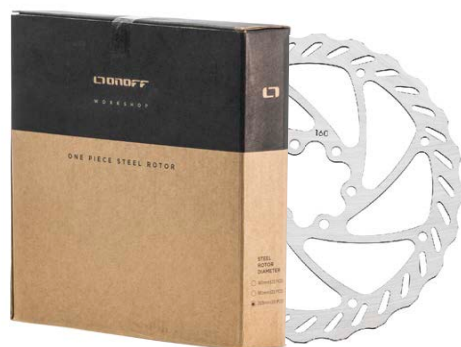

ROTOR

- High strength
- Superior heat dissipation
- Stainless steel
- Excellent disc wear

Diameter: 160mm, 180mm and 203mm

Quantity per box: 20pcs

Weight: 160mm (111g), 180mm (150g), 203mm (174g)



PAD BOX 25PCS

- Recommended use: The pad offers a perfect blend of feel and power and gives an excellent bite from cold. Suitable for daily use
- Very good noise characteristics
- Very low disc wear
- Advanced high strength steel back plate
- Compound: Kevlar, ceramic, copper, resin



Models:

- Shimano Deore organics
- Avid Elixir /DB1, DB3, DB5 / Sram Level, Level T, Level TL (2 pistons) organics
- Shimano XT/XTR organics
- Avid X0 trail organics



GEAR CABLE TIP

- Cable tip fits 1.2mm shift inner wire and smaller

Diameter: 1.2mm

Quantity per box: 1000pcs



BRAKE CABLE TIP

- Cable tip fits 1.6mm brake inner wire and smaller

Diameter: 1.6mm

Quantity per box: 1000pcs



GEAR HOUSING PLASTIC END CAP

- Housing cap fits 4mm shift housing
- Plastic

Diameter: 4mm

Quantity per box: 100pcs



BRAKE HOUSING PLASTIC END CAP

- Housing cap fits 5mm brake housing
- Plastic

Diameter: 5mm

Quantity per box: 100pcs



GEAR SHIFT HOUSING END CAP 4mm

- Housing cap fits 4mm shift housing
- Copper pressed

Diameter: 4mm
Quantity per box: 250pcs



GEAR BRAKE HOUSING END CAP 5mm

- Housing cap fits 5mm brake housing
- Copper pressed

Diameter: 5mm
Quantity per box: 250pcs



GEAR HOUSING ALLOY END CAP

- Made of CNC alloy

Diameter: 4mm
Quantity per box: 100pcs



BRAKE HOUSING ALLOY END CAP

- Made of CNC alloy

Diameter: 5mm
Quantity per box: 100pcs



**CNC MACHINED ALLOY M8*5
BANJO NUTS (SHIMANO / AVID / SRAM)**

- Made of CNC alloy

Metric: 8mm

Diameter: 5mm

Quantity per box: 10pcs



**CNC MACHINED ALLOY M6*12
BANJO BOLTS**

- Made of CNC alloy

Metric: 6mm

Diameter: 5mm

Quantity per box: 10pcs



**CNC MACHINED ALLOY M8*0.75
MALE BOLTS (SHIMANO / AVID / SRAM)**

- Made of CNC alloy

Metric: 8mm

Thread pitch: 0,75mm

Quantity per box: 10pcs



**CNC MACHINED NEEDLE
FOR SHIMANO 2.3MM**

- Made of CNC alloy
- Shimano compatible

Diameter: 2,3mm

Quantity per box: 25pcs



**CNC MACHINED OLIVER
FOR SHIMANO/AVID 5MM**

- Made of CNC alloy
- Avid/Sram/Shimano compatible

Diameter: 5mm

Quantity per box: 25pcs



**CNC MACHINED NEEDLE
FOR AVID/SRAM 2.4MM**

- Made of CNC alloy
- Avid/Sram compatible

Diameter: 2,35-2,4mm

Quantity per box: 25pcs



CABLES HOUSING CLIPS

- Brake / Gear Clip
- Brake / Brake Clip
- Gear / Gear Clip

Diameters:

- 5mm / 4mm
- 5mm / 5mm
- 4mm / 4mm

Quantity per bottle: 100pcs



MECHANICAL HOUSING KIT

• This kit includes everything needed to do the maintenance labours to the mechanical brake and shift systems

Box contents:

- Nosed cap for 5mm brake housing: 10pcs
- Nosed cap for 4mm brake housing: 10pcs
- Alloy CNC machined with sealed end for 4mm shift housing: 10pcs
- Alloy CNC machined with sealed end for 5mm brake housing: 10pcs
- Alloy CNC machined for 5mm brake housing: 10pcs
- Alloy CNC machined for 4mm shift housing: 10pcs
- Alloy pressed for 1.2mm shift inner wire: 20pcs
- Alloy pressed for 1.6mm brake inner wire: 20pcs
- Plastic cap for 5mm brake housing: 10pcs
- Plastic cap for 4mm shift housing: 10pcs
- Plastic cable tip fit shift inner wire: 10pcs
- Plastic cable tip fit brake inner wire: 10pcs



TITANIUM BOLTS KIT

• Made of CNC alloy

Box contents:

- M5*10mm (rotor bolts): 24pcs
- M6*18mm (brake adaptor bolts): 8pcs
- M5*18mm (stem bolts): 8pcs
- M5*16mm (botelcage bolts): 4pcs
- M6*30mm (headset cap bolts): 2pcs
- M6*29mm (headset cap bolts): 2pcs




HYDRAULIC LINE FITTING & ACCESORY KIT

• This kit includes everthing needed to do the maintenance labours to the SHIMANO, AVID/SRAM, MAGURA and HAYES braking systems

Box contents:

- Plastic rubber: 8pcs
- 0,2mm Shim: 30pcs
- 1mm Copper washer: 30pcs
- M8 Connector for Fórmula: 10pcs
- Oliver for Fórmula: 10pcs
- Needle for Fórmula 2,1mm: 10pcs
- M9 Connector for Magura: 10pcs
- Oliver for Magura 5 mm: 10pcs
- Needle for Magura 2,45mm: 10pcs
- M8 Connector for Shimano: 10pcs
- Needle for Shimano 2,3mm: 10pcs
- Oliver for Shimano 5mm: 10pcs
- M8 Connector for Avid/Sram: 10pcs
- Oliver for Avid/Sram 5mm: 10pcs
- Needle for Avid/Sram 2,35mm: 10pcs
- M8 Connector for Hayes: 10pcs
- Needle for Hayes 2,5mm: 10pcs
- Oliver for Hayes 5,5mm: 10pcs

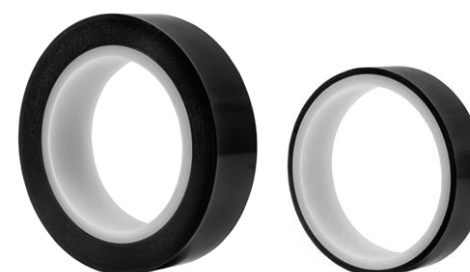

TUBELESS RIM TAPE

- Provides a perfect seal and long lasting leak proof performance
- Do not leaves adhesive resdues on the rim
- High pinch resistance

Available in 8 sizes:

- 23mm x 10m
- 26mm x 10m
- 29mm x 10m
- 32mm x 10m
- 36mm x 10m
- 26mm x 50m
- 29mm X 50m
- 32mm X 50m



TUBELESS SEALANT

- Professional quality
- Racing formula, latex based sealant
- Non-toxic / ammonia free / non-hazardous / non-corrosive
- CO2 cartridges compatible

Available in 4 formats: 0,5L, 1L, 5L and 10L (10L decanter includes dispenser tap)



TUBELESS ALLOY PRESTA VALVE

- Made of CNC alloy

Available in 3 sizes: 36mm, 40mm and 44mm



TUBELESS PRO BRASS PRESTA VALVE

- Made of CNC alloy

Available in 3 sizes: 36mm, 40mm and 44mm